

BLACK FEATHER
SERVICES

CAPABILITY STATEMENT · 2026

Precast Panel Post-Works & Concrete Repair

Sydney & regional NSW

TWO MATES RENOVATION PTY LTD
trading as Black Feather Services

ABN 83 659 949 809
ACN 659 949 809


Specialist finishing trades for commercial construction

Black Feather Services delivers the finishing works that sit between panel installation and practical completion: caulking and joint sealing, base and dowel grouting, plate and grout-tube patching, and full concrete remediation.

We work directly for precast manufacturers, panel installers, remedial builders and head contractors across the Sydney metropolitan area, and regional NSW by arrangement, on commercial, industrial and residential projects.

Our General Manager, **Bruno Wagner**, has more than ten years in the precast and concrete industry in Australia. Every crew member is directly engaged, uniformed and inducted, which is what allows us to hold quality and programme on repeat engagements rather than staffing a job and disappearing.

We understand that post-installation works sit on the critical path. Our commitment is a planned sequence, agreed with the builder and our supervisor at least one day ahead, so the trade behind us is never waiting.

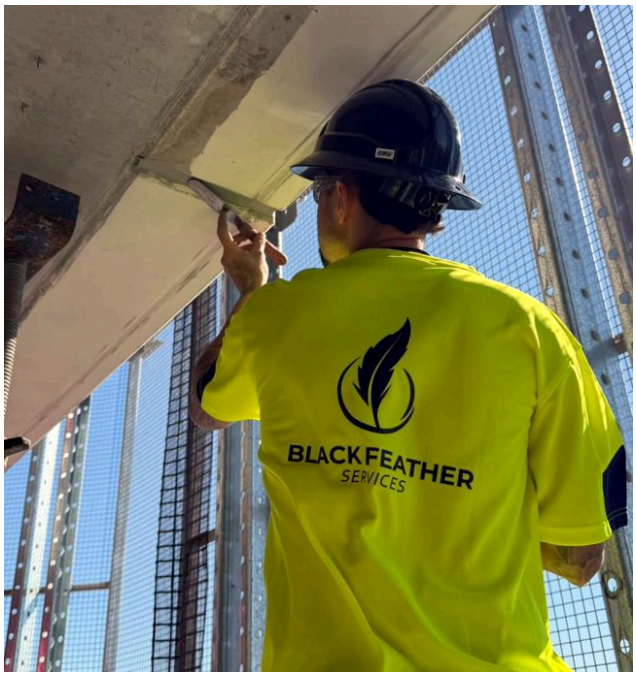

Joint sealing to precast soffit

LEGAL ENTITY	**Two Mates Renovation Pty Ltd**
TRADING AS	**Black Feather Services**
ABN	**83 659 949 809**
ACN	**659 949 809**
SERVICE AREA	**Greater Sydney · regional NSW**
PUBLIC LIABILITY	**AU$20,000,000**

WHAT SETS US APART

A directly employed, uniformed crew. Written sequencing agreed with the builder before start. Photographic records of every defect and rectification. And a rate structure that works by project or by hour, with or without material, so the engagement fits your contract, not ours.

Two service streams, one accountable crew



Precast Panel Post-Works

Works during and after the panel installation process, delivered to the manufacturer's specification and application requirements.

- Caulking & joint sealing, internal and external
- Base grouting
- Dowel grouting & liquid grouting
- Patching of lifting plates & grout tubes
- Expansion joints
- Fire-rated joint systems
- Panel-to-panel and panel-to-blockwork junctions
- Defect rectification & punch-list close-out



Concrete Care & Repair

Structural and cosmetic remediation where concrete integrity is the priority, from make-good to full spalling treatment.


- Concrete cancer & spalling treatment
- Exposed reinforcement treatment & reinstatement
- Honeycomb & general patching
- Crack repair
- Technical demolition
- Floor grinding & floor topping
- Correction of falls
- All grades of finishing product



Spalling & delamination



Reinforcement cleaned & treated

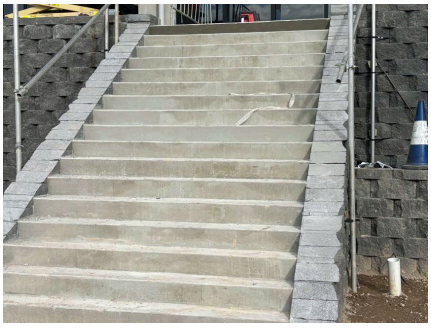

Completed concrete finishes

The same wall, start to finish

One parapet run, photographed from the same position at each stage. The pockets below held corroded cast-in fixings. The same face is shown as found, prepared, reinstated and finished.



01 As found. Repair pockets opened, cast-in fixings corroded, rust staining below each pocket.



02 Prepared. Pockets cut back square, washed out and coated with bonding agent.



03 Reinstated. Repair mortar applied and ruled back to the parapet line.



04 Complete. Continuous finished face, ready for coating.

Reinforcement is treated, not covered

Concrete is broken out square and cut back behind the bar, so the full circumference of the reinforcement is exposed rather than the face of it. Steel is cleaned to bare metal and coated with a zinc-rich primer before the section is reinstated.

Where the cause is cover depth or water ingress rather than the patch itself, we put that in writing before starting, so the builder can decide the scope with the engineer.



Reinforcement cleaned to bare metal and coated with zinc-rich primer, prior to reinstatement.

WHY THE REPAIR HOLDS

A patch applied over corroded steel hides the defect for a season and comes back larger. Cutting back behind the bar costs more time at break-out, and it is the difference between a repair and a cover-up.

Scope delivered on a single data centre package

Post-installation works on 400 precast panels for a data centre package, Marsden Park NSW, finished in four months in 2025. Figures below are the contracted scope for one project, not a career total.

5,070
LINEAL METRES · JOINT CAULKING

960
LINEAL METRES · BASE GROUTING

1,224
DOWEL GROUTINGS · 50 & 70 DIA

258
PLATE PATCHES · 250×350×12MM

Systems & materials

Systems specified and applied across recent packages. We install strictly to the manufacturer's written application requirements, and will match any product nominated by the builder or panel supplier.

- CROSBY 510
- SIKA 400 GREY
- FULLAFLEX FR
- UNITEX PANEL PATCH
- LW PANEL PATCH

Engagement models

- PROJECT PRICE
- HOURLY RATE
- WITH OR WITHOUT MATERIAL

Site requirements

Black Feather supplies platform ladders and steps for its workers. Mobile plant such as scissor and boom lifts is supplied by the client or builder. A panel installation schedule should be provided so crews are mobilised where and when needed.



Grout mixed on site to the panel install sequence

Recent projects

A selection of completed and current commercial and residential projects for head contractors and precast installers across Sydney.

BUILDER / CLIENT	PROJECT	LOCATION
Hindmarsh for Prestige Precast	Data centre package Stage One post-installation works · 2025	105-113 Hollinsworth Road, Marsden Park
Westbourne	The Collective · 2026	23-35 Atchison Street, St Leonards
BillBergia	Arncliffe Central · 2026, in progress	26-42 Eden Street, Arncliffe
Gartner Rose	Art Gallery Courtyard · 2026, in progress	Sydney
Ultra	The Bryson · 2026, in progress	871-877 Pacific Highway, Chatswood
Ultra	Neutral Bay · 2026	96 Ben Boyd Road, Neutral Bay



Joint preparation



Wall remediation



Floor topping, finished

PHOTOGRAPHIC RECORD

Every defect and rectification is photographed and filed by project, so the builder receives a documented close-out rather than a verbal sign-off. Records are available on request for any project listed above.

Insured, inducted and site ready

PUBLIC & PRODUCTS LIABILITY	**AU$20,000,000** Berkley Insurance Australia · to 7 April 2027
WORKERS COMPENSATION	**icare NSW** Current to 31 March 2027
CONSTRUCTION INDUCTION	**White Card (CPCCWHS1001) · all workers**
SITE INDUCTIONS	**Completed on every head contractor's site prior to start**
GST	**Registered**
CERTIFICATES	**Available on request**

On-site practice

- Gloves, safety glasses, hard hats and boots supplied to every worker
- Fortnightly toolbox talks raising current site safety points
- Silica Awareness training and mask fit test completed by every worker
- Height safety equipment and harness use where required
- Task sequence agreed with builder and supervisor one day prior to start
- Compliance with head contractor site rules and inductions



Height safety, panel joint works



Respiratory protection during overhead application

DOCUMENTATION ON REQUEST

Certificates of currency for public liability and workers compensation, White Card records and product data sheets are issued on request at tender stage, and supplied directly to the head contractor's compliance portal where required.

BLACK FEATHER
SERVICES

07 · CONTACT

Let's price your next package.

Send us the panel schedule, the drawings or the defect list and we will come back with a quote within one business day, by project or by hour, with or without material. We work across Greater Sydney and regional NSW, and mobilise to your install programme within a week of acceptance, depending on the size of the package.

CONTACT	**Bruno Wagner · General Manager**
PHONE	**0449 099 192 · +61 449 099 192**
EMAIL	**info@blackfeatherservices.com.au**
WEB	**blackfeatherservices.com.au**
ADDRESS	**832 Military Road, Mosman NSW 2088**